

PATTYN
A DURAVANT COMPANY

CASE CLOSER
CC-41

The CC-41 automatically folds the top case flaps and closes them with tape. To maximize operator convenience, the software of the case closer is integrated in the bag closer.

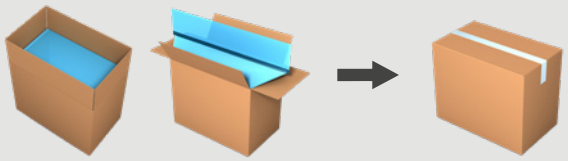

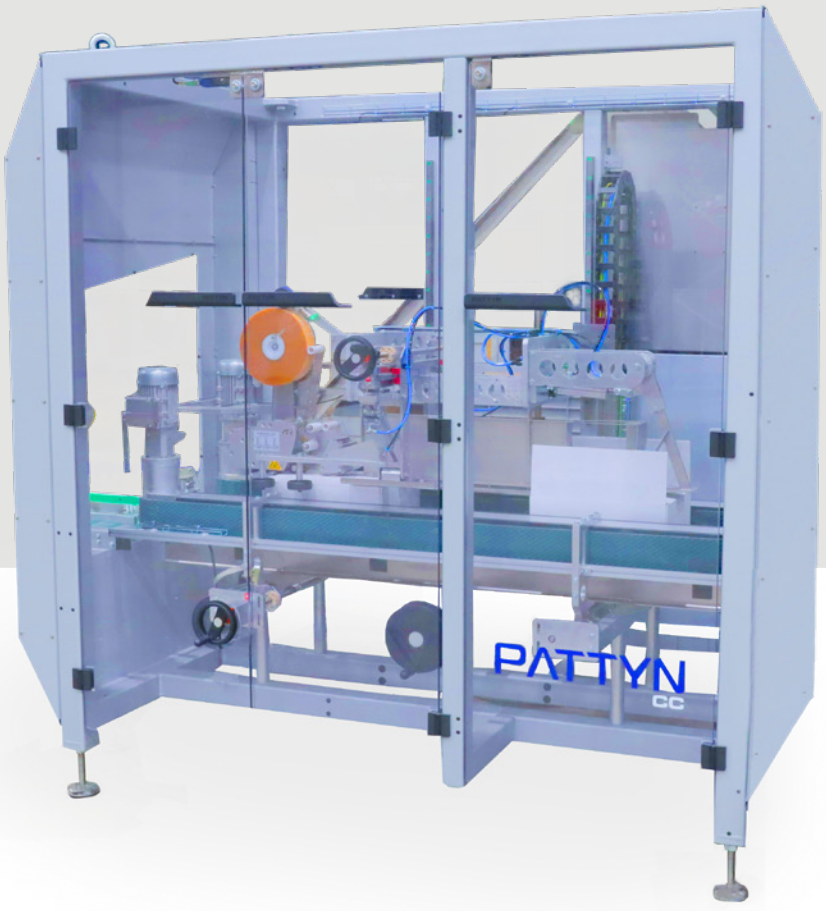

HEAVY DUTY CASE CLOSER

Industrial Design to avoid production stops

- **Heavy duty machine for a reliable production 24/7.**
- **Standard robust taper head** with open design for easy tape exchange.
- **Floating taper head** (optional).

Protect your product & reduce costs

- **Perfectly controlled** case closing thanks to the pneumatic driven long flap folding.
- **High-quality components** reduce maintenance and spare parts costs.
- **Easily adjustable**

Watch our videos at pattyn.com

TECHNICAL SPECIFICATIONS

Perfectly controlled case closing
- Case stop for rear flap folding.
- Pneumatic driven folding plates for long flap folding.
- The long case flaps are joined perfectly thanks to lateral wheels.
- Flexible side belts ensuring the same grip, even if the box width slightly varies.


Heavy duty
- Direct motor driven side belts.
- Heavy duty machine frame with easy access for maintenance.

Standard integrated in the bag closer to save floorspace
- Visualize all messages in the bag closer HMI.
- The case closer is controlled by the bag closer.
- One integrated safety area.
- One power supply.


Standard equipped with
- In- and outfeed guarding.
- Adjustable box pressing before taping.
- Remote Access Point (one per line).

CASE SPECIFICATIONS (For other dimensions, please contact Pattyn)	
Range (L x W x H) mm	Min. 200 (L) x 190 (W) x 130 (H) // 225 (D) Max. 650 (L) x 410 (W) x 450 (H) // 655 (D)
	Outside dimensions
TAPE SPECIFICATIONS	
Type	2" inch tape
Tape roll length	990 m
Tape roll diameter	Max. 300 mm
OUTPUT AND CONSUMPTION	
Output tape	Up to 20 cases/minute (for 2" tape)*
Installed power	1 kW
Voltage	3 x 400 V + N + E / 50 Hz
Air supply	6 bar / 1/2" min
Air consumption	3 Nl/cycle
Weight	750 kg
OPTIONS (more options are available, please contact Pattyn)	
Stainless steel execution	
3" tape (speed up to 16 cases/minute)*	
Complete detection set tape	
Flaps control section	
Bottom belt drive for pails	
Stand-alone machine	
15"HMI (for stand-alone machine)	
Floating taper head	
Machine roof	
Motor driven width and height regulation	
Infeed separator	


*Depends on qualtiy of the tape and carton



Pneumatic driven long flap folding

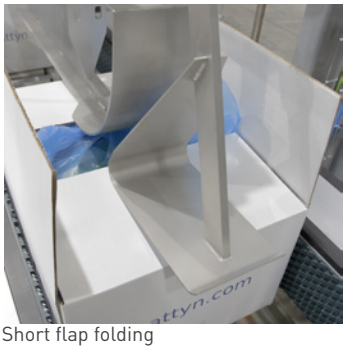


Short flap folding



Robust side belts, driven by 2 motors


Easy tape loading system for upper taper

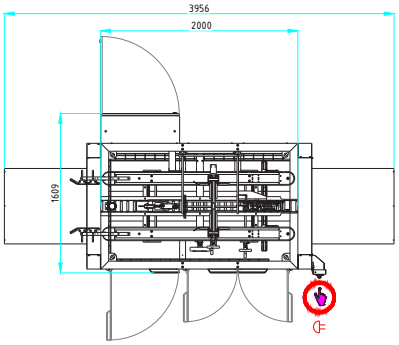

Machine height: 2385 mm

Pattyn Belgium nv
Industriepark 'Blauwe Toren'
Hoge Hul 2, 8000 Brugge - Belgium

T +32 (0) 50 450 480
info@pattyn.com
www.pattyn.com

pattyn.com

The description, pictures and information given have an indicative value. We reserve the right to make changes without notice. Information and content is property of Pattyn. For customised executions please contact Pattyn. CC-41 2023 - V01

PATTYN
A DURAVANT COMPANY

Turnkey solutions for industrial packaging.